


Construction Features

- **Energy Saving Pipe Wrap Kit** - reduces heat loss through plumbing lines.
- **Temperature and Pressure Relief Valve** - factory installed.
- **Watertight Grommets** - keep out overhead moisture and condensation.
- **Seamless Molded Non-metallic Inner Tank** - can't rust or corrode.
- **Fill Tube** - high temperature material to withstand thermal storage and other high temperature applications.
- **High-tech Heating Elements** - upper element fused to protect tank against "dry fire." Bottom element is low-watt density, stainless alloy for long life.
- **Polyethylene Outer Jacket** - resists dents and scratches during transit, installation and beyond.
- **Envirofoam®** - a great energy saver and friendly to the ozone layer—it's made without CFCs and HCFCs.
- **Filament-wound Fiberglass Tank** - has unmatched strength.
- **Recessed Drain Valve** - protected from damage.

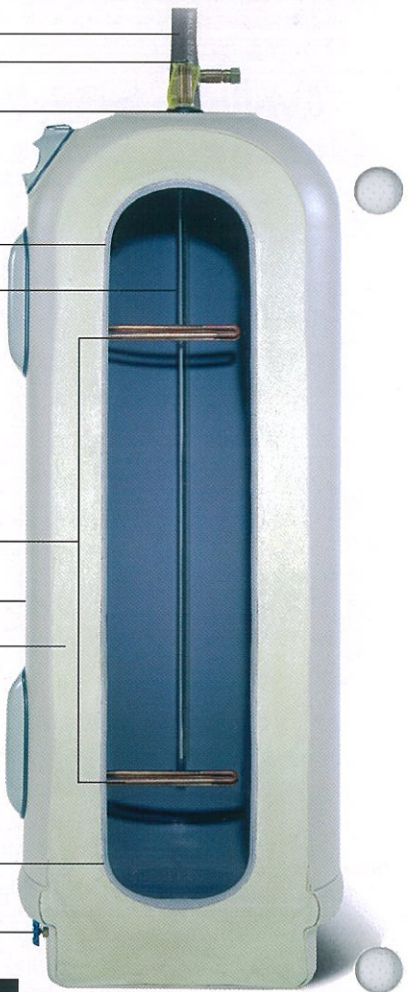

Point-of-Use Single Element Models

Model	Gallon Capacity	Element Wattage	Recovery @90°F Gal/Hr	Voltage	Nominal Dimensions			Shipping Weight	Shipping Carton
					A	B	C		
MR15120	15	2000	9.1	120 volt	21.62"	31.62"	35.62"	58 lbs.	22 X 22 X 37
MR20120	20	2000	9.1	120 volt	23.50"	30.50"	34.50"	61 lbs.	23.75 X 23.75 X 36
MR20230	20	3000	13.6	240 volt	23.50"	30.50"	34.50"	61 lbs.	23.75 X 23.75 X 36


Note: First hour ratings and energy factors are not performance measurements on water heaters of 20 gallons or less.

Standard Dual Element Models

Model	Gallon Capacity	Element Wattage	Recovery @90°F Gal/Hr	First Hour Rating	Energy Factor	Nominal Dimensions			Shipping Weight	Shipping Carton
						A	B	C		
MR30238	30	3800/3800	17.3	39 gal.	.94	21.62"	49.00"	53.00"	75 lbs.	22 X 22 X 54.5
MR30245	30	4500/4500	20.0	42 gal.	.94	21.62"	49.00"	53.00"	75 lbs.	22 X 22 X 54.5
MR40238	40	3800/3800	17.3	48 gal.	.94	21.62"	61.50"	65.50"	90 lbs.	22 X 22 X 67
MR40245	40	4500/4500	20.0	52 gal.	.94	21.62"	61.50"	65.50"	90 lbs.	22 X 22 X 67
MR50238	50	3800/3800	17.3	58 gal.	.94	23.50"	62.75"	66.75"	100 lbs.	23.75 X 23.75 X 68
MR50245	50	4500/4500	20.0	61 gal.	.94	23.50"	62.75"	66.75"	100 lbs.	23.75 X 23.75 X 68
MSR50238	50	3800/3800	17.3	51 gal.	.94	28.25"	43.25"	47.25"	95 lbs.	28.25 X 28.25 X 49
MSR50245	50	4500/4500	20.0	54 gal.	.94	28.25"	43.25"	47.25"	95 lbs.	28.25 X 28.25 X 49
MR75238	75	3800/3800	17.3	75 gal.	.92	28.25"	58.62"	62.62"	122 lbs.	28.25 X 28.25 X 64.25
MR75245	75	4500/4500	20.0	78 gal.	.92	28.25"	58.62"	62.62"	122 lbs.	28.25 X 28.25 X 64.25
MR85230	85	3000/3000	13.6	84 gal.	.92	28.25"	66.25"	70.25"	134 lbs.	28.25 X 28.25 X 72
MR85238	85	3800/3800	17.3	87 gal.	.92	28.25"	66.25"	70.25"	134 lbs.	28.25 X 28.25 X 72
MR85245	85	4500/4500	20.0	91 gal.	.92	28.25"	66.25"	70.25"	134 lbs.	28.25 X 28.25 X 72
MR105238	105	3800/3800	17.3	101 gal.	.91	30.25"	66.75"	70.75"	152 lbs.	30.25 X 30.25 X 72.5
MR105245	105	4500/4500	20.0	104 gal.	.91	30.25"	66.75"	70.75"	152 lbs.	30.25 X 30.25 X 72.5

Notes: 240 Volt AC single phase, standard

Maximum test pressure: 300 PSI
Maximum working pressure: 150 PSI

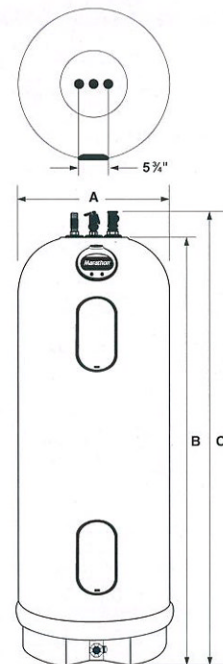

"In keeping with our policy of continuous progress and product improvement, we reserve the right to make changes without notice."

Marathon is a registered trademark of Water Heater Innovations, Inc.

Marathon®
WATER HEATERS

Marathon Water Heaters
3107 Sibley Memorial Highway
Eagan, MN 55121
1-800-321-6718

www.marathonheaters.com

A **Rheem** Company

P/N 231770 09/05
Copyright 2003 Water Heater Innovations, Inc.